



Fast Reeve Crane Blocks

3 sheaves >>

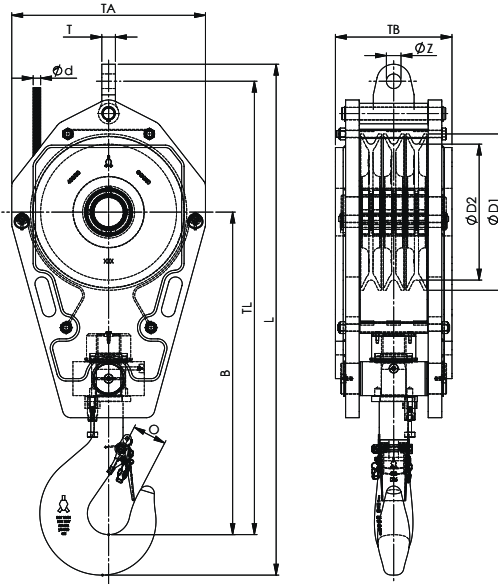

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL UStons	For wire ød inch	Hook size	Dimensions (inch)										Weight lbs
				øD1	øD2	B	O	TA	TB	TL	L	T	øZ	
FRB 225.xx.3.20.EB	22	3/8 - 1/2	8	10.2	8.9	28.3	3.1	13.6	7.1	39.1	44.4	TBD	TBD	410
FRB 260.xx.3.20.EB	22	7/16 - 5/8	8	11.8	10.2	28.5	3.1	15.7	8.7	40.1	45.4	TBD	TBD	410
FRB 260.xx.3.25.E	27.5	7/16 - 5/8	8	11.8	10.2	27.5	3.1	15.7	10.2	39.1	44.4	TBD	TBD	465
FRB 285.xx.3.29.EB	32	1/2 - 3/4	10	12.6	11.0	27.7	3.5	16.5	10.2	39.9	45.2	TBD	TBD	460
FRB 320.xx.3.29.EA	32	9/16 - 3/4	8	14.4	12.6	30.0	3.1	17.7	8.7	43.1	48.5	TBD	TBD	460
FRB 320.xx.3.29.EB	32	9/16 - 3/4	8	14.4	12.6	30.0	3.1	17.7	9.1	43.1	48.5	TBD	TBD	495
FRB 260.xx.3.32.E	35	7/16 - 5/8	10	11.8	10.2	28.9	3.5	15.7	9.4	40.5	46.3	TBD	TBD	465
FRB 260.xx.3.32.EA	35	7/16 - 5/8	10	11.8	10.2	28.9	3.5	15.7	10.4	40.5	46.3	TBD	TBD	525
FRB 285.xx.3.32.EB	35	1/2 - 3/4	10	12.6	11.0	30.0	3.5	16.5	9.4	42.2	48.0	TBD	TBD	505
FRB 355.xx.3.35.EA	38,5	9/16 - 7/8	10	16.1	14.0	34.0	3.5	19.7	9.4	47.6	53.5	TBD	TBD	700
FRB 355.xx.3.35.EB	38,5	9/16 - 7/8	10	16.1	14.0	34.0	3.5	19.7	10.6	47.6	53.5	TBD	TBD	825
FRB 355.xx.3.37.EA	40	9/16 - 7/8	10	16.1	14.0	34.0	3.5	19.7	9.4	47.6	53.5	TBD	TBD	700
FRB 355.xx.3.37.EB	40	9/16 - 7/8	10	16.1	14.0	34.0	3.5	19.7	11.0	47.6	53.5	TBD	TBD	825
FRB 360.xx.3.40.E	45	5/8 - 7/8	12	16.5	14.2	35.4	3.9	20.1	13.5	49.4	55.8	TBD	TBD	1000
FRB 360.xx.3.41.E	45	5/8 - 7/8	12	16.5	14.2	35.4	3.9	20.1	11.9	49.3	55.8	TBD	TBD	900
FRB 400.xx.3.40.E	45	5/8 - 1	12	18.1	15.7	36.5	3.9	22.4	13.5	52.1	58.5	TBD	TBD	1000
FRB 360.xx.3.50.E	55	5/8 - 7/8	12	16.5	14.2	35.4	3.9	20.1	15.8	49.4	56.3	TBD	TBD	1200
FRB 400.xx.3.50.EA	55	5/8 - 1	12	18.1	15.7	37.4	3.9	22.4	13.5	52.1	59.1	TBD	TBD	1100
FRB 400.xx.3.50.EB	55	5/8 - 1	12	18.1	15.7	37.4	3.9	22.4	13.5	52.1	59.3	TBD	TBD	1200
FRB 360.xx.3.55.EA	60	5/8 - 7/8	12	16.5	14.2	35.4	3.9	20.1	11.9	49.3	55.8	TBD	TBD	900
FRB 360.xx.3.55.EB	60	5/8 - 7/8	12	16.5	14.2	35.4	3.9	20.1	15.4	49.3	55.8	TBD	TBD	1200
FRB 400.xx.3.55.EA	60	5/8 - 1	12	18.1	15.7	37.4	3.9	22.4	13.5	52.1	59.1	TBD	TBD	1100
FRB 400.xx.3.55.EB	55	5/8 - 1	12	18.1	15.7	37.4	3.9	22.4	13.5	52.1	59.3	TBD	TBD	1200
FRB 450.xx.3.64.EA	70	3/4 - 1 1/8	16	20.3	17.7	40.9	4.4	23.6	13.1	57.2	64.8	TBD	TBD	1500
FRB 450.xx.3.64.EB	70	3/4 - 1 1/8	16	20.3	17.7	40.9	4.4	23.6	14.3	57.2	64.8	TBD	TBD	1600



NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size

Minimum Ultimate Strength = 4 x WLL.

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Hook locking pin included on all blocks 40M ton and higher

<< Fast Reeve Crane Blocks

3 sheaves

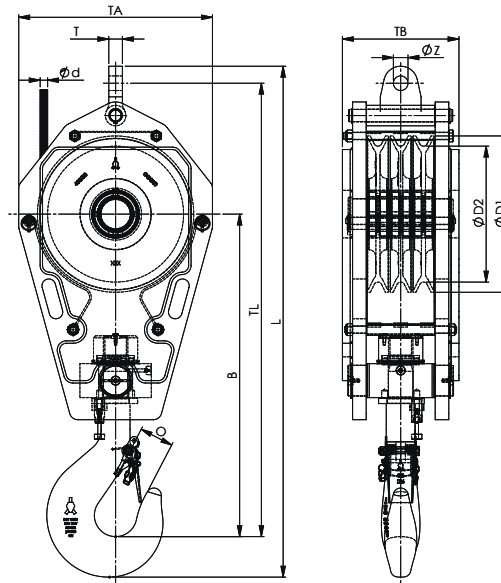

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL USTons	For wire ød inch	Hook size	Dimensions (inch)										Weight lbs
				øD1	øD2	B	O	TA	TB	TL	L	T	øZ	
FRB 450.xx.3.70.EA	77	¾ - 1 ⅝	16	20.3	17.7	41.1	4.4	23.6	13.1	57.4	64.6	TBD	TBD	1500
FRB 450.xx.3.70.EB	77	¾ - 1 ⅝	16	20.3	17.7	41.1	4.4	23.6	14.3	57.4	64.6	TBD	TBD	1700
FRB 450.xx.3.70.EC	77	¾ - 1 ⅝	16	20.3	17.7	41.1	4.4	23.6	14.7	57.4	64.6	TBD	TBD	1800
FRB 528.xx.3.70.E	77	7/8 - 1 ¼	16	23.4	20.8	47.6	4.4	28.0	15.1	65.9	73.5	TBD	TBD	2350
FRB 450.xx.3.82.EA	90	¾ - 1 ⅝	20	20.3	17.7	46.5	4.9	23.6	15.0	62.8	70.7	TBD	TBD	1800
FRB 450.xx.3.82.EB	90	¾ - 1 ⅝	20	20.3	17.7	46.5	4.9	23.6	18.2	62.8	70.7	TBD	TBD	2200
FRB 528.xx.3.82.E	90	7/8 - 1 ¼	20	23.4	20.8	50.1	4.9	28.0	16.2	68.3	76.6	TBD	TBD	2500
FRB 528.xx.3.82.EB	90	7/8 - 1 ¼	20	23.4	20.8	50.1	4.9	28.0	16.2	68.3	76.6	TBD	TBD	2800
FRB 528.xx.3.100.E	110	7/8 - 1 ¼	25	23.4	20.8	53.7	5.5	28.0	18.2	71.9	80.9	TBD	TBD	3000
FRB 575.xx.3.100.E	110	7/8 - 1 ¼	25	25.6	22.6	51.3	5.5	30.3	17.0	71.2	80.6	TBD	TBD	3000
FRB 670.xx.3.100.EA	110	1 - 1 ½	25	29.9	26.4	55.2	5.5	34.3	14.3	77.5	87.0	TBD	TBD	3000
FRB 670.xx.3.100.EB	110	1 - 1 ½	25	29.9	26.4	55.2	5.5	34.3	16.2	77.5	87.0	TBD	TBD	3500
FRB 670.xx.3.100.EC	110	1 - 1 ½	25	29.9	26.4	55.2	5.5	34.3	17.8	77.5	87.0	TBD	TBD	4000
FRB 670.xx.3.125.E	137,5	1 - 1 ½	25	29.9	26.4	56.2	5.5	34.3	24.5	78.5	87.9	TBD	TBD	6380
FRB 670.xx.3.137.D	150	1 - 1 ½	32	29.9	26.4	0.0	6.3	0.0	41.0	0.0	0.0	TBD	TBD	8600

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size

Minimum Ultimate Strength = 4 x WLL.

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Hook locking pin included on all blocks 40M ton and higher