



Fast Reeve crane Blocks >>

3 sheaves

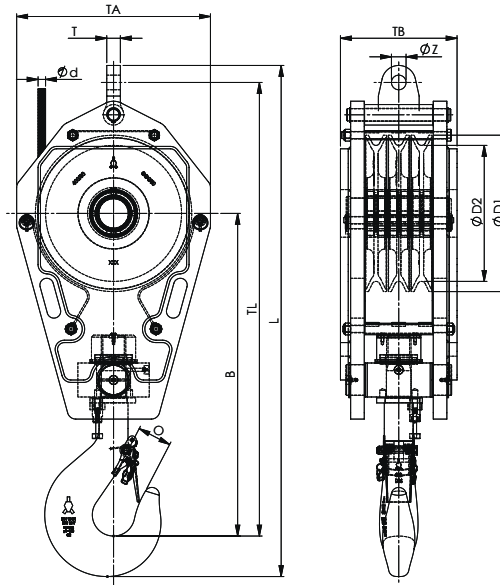

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL	For wire ød	Hook size	Dimensions (mm)										Weight (kg)
	Mtons	mm		øD1	øD2	B	O	TA	TB	TL	L	T	øZ	
FRB 225.14.3.20.E	20	14	8	260	225	718	69	345	180	993	1128	28	32	130
FRB 260.14.3.20.E	20	14	8	300	260	723	69	400	220	1018	1153	28	32	185
FRB 260.14.3.25.E	25	14	8	300	260	698	69	400	260	993	1128	28	32	210
FRB 285.16.3.29.E	29	16	8	320	280	703	69	420	180	1013	1148	28	32	210
FRB 320.16.3.20.E	20	16	8	365	320	763	69	450	180	1096	1231	28	32	160
FRB 320.16.3.25.E	25	16	8	365	320	763	69	450	220	1096	1231	28	32	205
FRB 320.16.3.29.E.A	29	16	8	365	320	763	69	450	220	1096	1231	28	32	210
FRB 320.16.3.29.E.B	29	16	8	365	320	763	69	450	230	1096	1231	28	32	225
FRB 355.19.3.32.E	32	19	10	410	355	863	76	500	280	1208	1359	35	37	370
FRB 360.19.3.40.E	40	19	12	420	360	899	84	510	342	1254	1417	35	37	455
FRB 360.19.3.50.E	50	19	16	420	360	899	97	510	402	1254	1431	35	37	555
FRB 400.19.3.40.E	40	19	12	460	400	928	84	570	343	1323	1486	35	37	500
FRB 400.19.3.50.E	50	19	16	460	400	949	97	570	343	1324	1501	35	37	540
FRB 400.22.3.50.E	50	22	16	460	400	949	97	570	343	1324	1506	40	43	540





Minimum Ultimate Strength = 4 x WLL.

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size ■ Hook locking pin included on all blocks 40M ton and higher

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.

<< Fast Reeve crane Blocks

3 sheaves

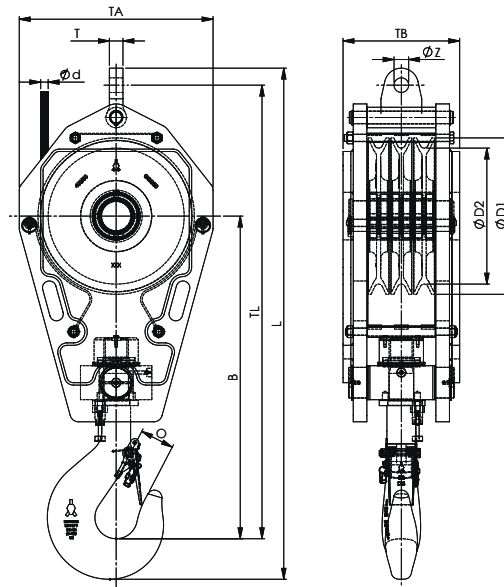

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL	For wire ød	Hook size	Dimensions (mm)										Weight (kg)
	Mtons	mm		øD1	øD2	B	O	TA	TB	TL	L	T	øZ	
FRB 450.22.3.63.E	63	22	16	515	450	1038	97	600	303	1448	1630	40	43	600
FRB 450.24.3.63.E.A	63	24	16	515	450	1038	97	600	313	1454	1646	45	52	650
FRB 450.24.3.63.E.B	63	24	16	515	450	1038	97	600	363	1454	1646	45	52	770
FRB 450.26.3.63.E.A	63	26	16	515	450	1038	97	600	313	1461	1653	45	52	650
FRB 450.26.3.63.E.B	63	26	16	515	450	1038	97	600	363	1461	1653	45	52	770
FRB 450.26.3.80.E	80	26	20	515	450	1182	110	600	362	1605	1815	45	52	810
FRB 528.24.3.80.E	80	24	20	595	528	1272	110	710	412	1736	1946	45	52	1130
FRB 528.26.3.80.E	80	26	20	595	528	1272	110	710	412	1736	1946	45	52	1130
FRB 528.26.3.100.E	100	26	25	595	528	1363	132	710	462	1826	2056	45	52	1360
FRB 528.28.3.80.E	80	28	20	595	528	1272	110	710	412	1751	1971	50	59	1130
FRB 528.28.3.100.E	100	28	25	595	528	1363	132	710	462	1841	2081	50	59	1360
FRB 575.28.3.100.E	100	28	25	650	575	1303	132	770	432	1808	2048	50	59	1360
FRB 670.28.3.125.E	125	28	25	760	670	1428	132	870	622	1993	2233	50	59	2900
FRB 670.32.3.125.E	125	32	25	760	670	1428	132	870	622	1993	2238	60	66	2900

Minimum Ultimate Strength = 4 x WLL.

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size ■ Hook locking pin included on all blocks 40M ton and higher

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.