

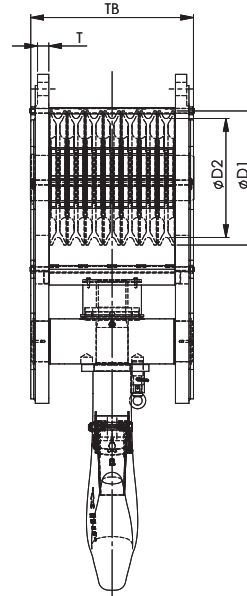


Fast Reeve crane Blocks

7 sheaves

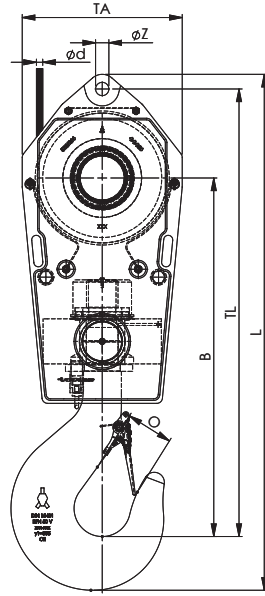

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL	For wire ød	Hook size	Dimensions (mm)										Weight (kg)
	Mtons	mm		øD1	øD2	B	O	TA	TB	TL	L	T	øZ	
FRB 450.22.7.125.E	125	22	32	596	528	1313	137	600	577	1668	1858	40	43	1600
FRB 450.24.7.160.E	160	24	40	596	528	1416	167	600	682	1771	1983	45	52	1820
FRB 528.24.7.160.E	160	24	40	596	528	1581	167	710	682	2017	2229	45	52	2100
FRB 528.26.7.160.E	160	26	40	596	528	1581	167	710	682	2017	2229	45	52	2100
FRB 528.24.7.200.E	200	24	50	596	528	1591	188	710	722	2051	2287	45	52	2500
FRB 528.26.7.200.E	200	26	50	596	528	1591	188	710	722	2051	2287	45	52	2500
FRB 528.28.7.200.E	200	28	50	596	528	1591	188	710	722	2051	2287	50	59	2500
FRB 575.28.7.250.E	250	28	63	650	575	1837	205	770	682	2257	2522	50	59	2800
FRB 670.28.7.272.E	272	28	63	760	670	1852	205	870	1032	2342	2607	50	59	4890
FRB 670.32.7.272.E	272	32	63	760	670	1852	205	870	1032	2342	2607	60	66	4890

Minimum Ultimate Strength = 4 x WLL.

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size ■ Hook locking pin included on all blocks 40M ton and higher

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.