


Overhaul Balls

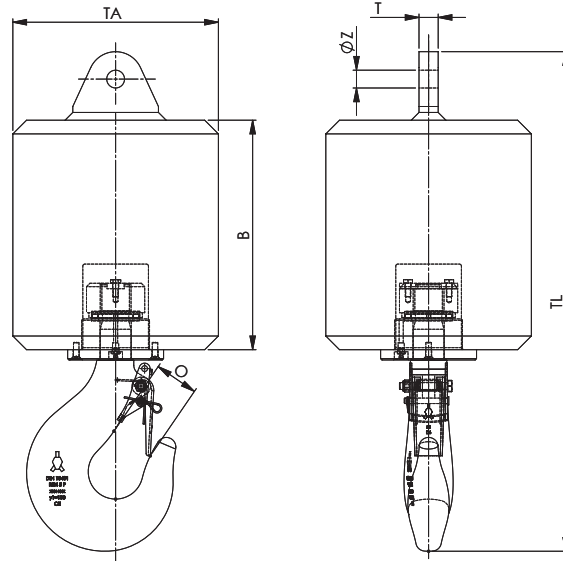

Model Nr.	WLL UStons	For wire ød inch	Hook size	Becket	Dimensions (inch)						Weight lbs
					B	O	TA	TL	T	Z	
OHB 3,2.60.C-1	3.5	1/2	2,5	1	7 7/8	1 15/16	8 11/16	19 11/16	7/8	1 1/8	130
OHB 3,2.60.C-2	3.5	9/16 - 5/8	2,5	2	7 7/8	1 15/16	8 11/16	19 7/8	1 1/8	1 1/4	130
OHB 5.80.C-2	5.5	9/16 - 5/8	2,5	2	8 11/16	1 15/16	9 3/8	22 5/16	1 1/8	1 1/4	175
OHB 6,3.80.C-2	6.9	9/16 - 5/8	2,5	2	8 11/16	1 15/16	9 3/8	22 5/16	1 1/8	1 1/4	175
OHB 8.130.C-3	8.8	3/4	4	3	12 3/16	2 3/16	10 1/8	28 5/16	1 3/8	1 7/16	285
OHB 8.170.C-3	8.8	3/4	4	3	13 3/8	2 3/16	10 15/16	26 13/16	1 3/8	1 7/16	375
OHB 8.200.C-3	8.8	3/4	5	3	13 3/16	2 1/2	11 13/16	28 11/16	1 1/8	1	440
OHB 8.250.C.3	8.8	3/4	4	3	15 3/4	2 3/16	12 1/2	34	1 3/8	1 7/16	550
OHB 10.210.C-4	11	7/8	4	4	14 15/16	2 3/16	11 3/4	29 9/16	1 9/16	1 11/16	460
OHB 10.250.C-5	11	1	4	5	15 12/16	2 3/16	12 1/2	30 3/8	1 3/4	2 1/16	550
OHB 12.300.C	13.2	7/8 - 1	8	O.R.	14 5/8	3 1/8	13 13/16	34 7/8	1 1/8	1 3/8	660
OHB 12.328.C-4	13.2	7/8	5	4	15 13/16	2 1/2	13 3/4	34 3/8	1 1/16	1 11/16	722
OHB 12.400.C	13.2	13/16 - 1	8	O.R.	16 5/16	3 1/8	15	36 11/16	1 1/8	1 3/8	880
OHB 12,5.200.C-4	13.75	7/8	5	4	13 3/16	2 1/2	11 13/16	31 1/4	1 9/16	1 11/16	440
OHB 12,5.250.C-5	13.75	1	5	5	15 3/4	2 1/2	12 1/2	32 5/8	1 3/4	2 1/16	550
OHB 12,5.370.C-5	13.75	1	5	5	17 11/16	2 1/2	13 3/4	34 5/8	1 3/4	2 1/16	814
OHB 16.275.P-4	17.6	7/8	6	4	13 13/16	2 13/16	13 13/16	34	1 5/8	1 11/16	605
OHB 16.370.C-5	17.6	1	6	5	17 11/16	2 13/16	12 1/2	38 11/16	1 3/4	2 1/16	814
OHB 16.450.C-5	17.6	1	6	5	17 5/16	2 13/16	15 3/4	38 1/4	1 3/4	2 1/16	990
OHB 16.545.P-5	17.6	1	6	5	18 1/8	2 13/16	17 11/16	39 1/2	1 3/4	2 1/16	1200
OHB 20.575.P-6	22	1 1/8	8	6	18 1/2	3 1/8	16	42 3/16	1 15/16	2 5/16	1265
OHB 20.600.P-6	22	1 1/8	8	6	18 11/16	3 1/8	17 11/16	42	2	2 5/16	1320
OHB 20.725.P-6	22	1 1/8	8	6	36	3 1/8	17 11/16	47 3/16	1 15/16	2 5/16	1600
OHB 20.910.P-6	22	1 1/8	8	6	24 3/16	3 1/8	19 11/16	47 3/8	1 15/16	2 5/16	2000
OHB 25.725.P-7	27.5	1 1/4	8	7	20 1/16	3 1/8	18 1/8	42 7/16	2 3/8	2 9/16	1600
OHB 25.725.P-8	27.5	1 3/8	8	8	20 1/16	3 1/8	18 1/8	42 7/16	2 3/8	2 9/16	1600
OHB 25.910.P-7	27.5	1 1/4	8	7	24	3 1/8	18 1/8	46 3/8	2 3/8	2 9/16	2000
OHB 25.910.P-8	27.5	1 3/8	8	8	24	3 3/16	18 1/8	46 3/8	2 3/8	2 9/16	2000
OHB 32.365.P-8	35	1 1/8	10	6	15 3/4	3 9/16	14 9/16	49 5/8	2 9/16	2 5/8	800
OHB 32.725.P-7	35	1 1/4	10	7	23 5/8	3 9/16	17 11/16	45 3/8	2 3/8	2 9/16	1600
OHB 32.910.P-9	35	1 1/2	10	9	24 3/16	3 9/16	19 11/16	46	2 3/4	2 13/16	2000

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Hook locking pin included on all blocks 40M ton and higher

Minimum Ultimate Strength = 4 x WLL.