
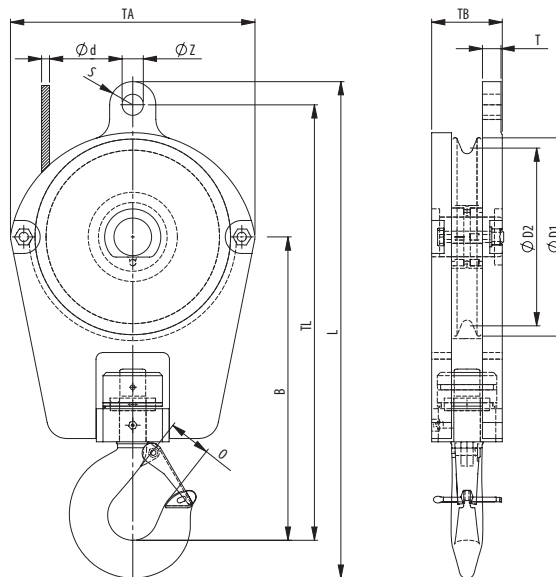


Single Sheave Compact Crane Blocks, Single action hook

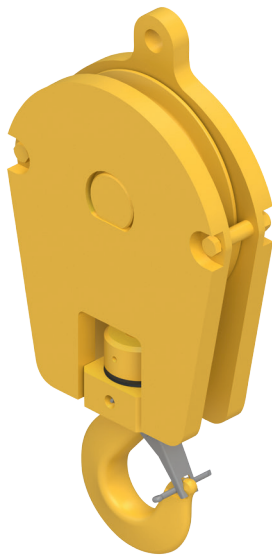

Model No.	Stock No.	WLL (t)	for wire ϕd (mm)	Dimensions (mm)										Weight (kg)
				$\phi D1$	$\phi D2$	B	O	S	TA	TB	TL	T	ϕZ	
HB 210.11.1.5.E	21.250.05.11-11	5	11	250	210	348	34	30	320	103	523	20	27	41
HB 220.13.1.5.E	21.260.05.11-13	5	13	260	221	353	34	30	353	109	525	22	27	67
HB 220.14.1.8.E	21.260.08.11-14	8	14	260	218	390	43	35	330	121	571	28	32	80
HB 220.14.1.10.E	21.260.10.11-14	10	14	260	218	429	52	35	330	137	609	28	32	93
HB 255.13.1.8.E	21.300.08.11-13	8	13	300	255	426	43	30	370	101	621	22	27	89
HB 255.16.1.8.E	21.300.08.11-16	8	16	300	252	420	43	35	370	111	621	28	32	94
HB 255.16.1.10.E	21.300.10.11-16	10	16	300	252	459	52	35	370	127	659	28	32	91
HB 305.16.1.10.E	21.350.10.11-16	10	16	350	305	499	52	35	435	107	739	28	33	113
HB 345.18.1.12.E	21.400.12.11-18	12	18	400	345	557	57	45	500	125	832	35	37	162
HB 390.20.1.16.E	21.450.16.11-20	16	20	450	390	592	57	50	550	131	917	35	43	206
HB 430.22.1.20.E	21.500.20.11-22	20	22	500	430	592	76	50	600	148	1032	40	43	284

Minimum Ultimate Strength = 4 x WLL.

- Standard fitted with becket, cylindrical roller bearing and reeving guide.
- Standard fitted with Crosby type of swivel only hook (319AN style), including safety latch and split pin.
- Standard painted yellow (no striping).
- This crane block may be used with 2 lines only as well.
- Third party testing with certification available upon request.
- Sheaves may be adjusted for other wire rope diameters.
- Becket suitable for connecting Open Wedge Socket for indicated wire rope.
- Becket can not be adjusted.