


Snatch Blocks

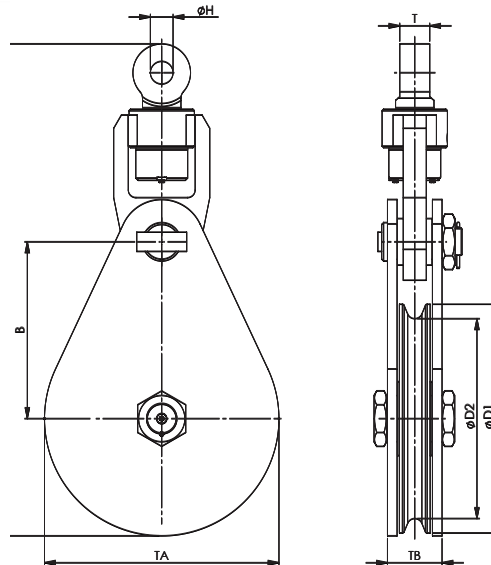

- Hook
- Clevis
- Tailbord
- Oblong eye

Model Nr.	Dimensions (mm)								Weight (kg)
	øD1	øD2	B	øH	T	TA	TB	TC (TL)	
VB 240.28.1.20.S	300	240	255	37	48	310	84	735	55
VB 240.28.1.25.S	300	240	255	40	54	310	84	727	55
VB 300.28.1.20.S	365	300	288	37	48	375	84	798	60
VB 300.32.1.25.S	365	300	288	40	54	375	84	793	63
VB 345.32.1.32.S	400	345	325	53	70	410	112	949	65
VB 345.36.1.32.S	400	345	325	53	70	410	112	949	120
VB 390.26.1.25.S	450	390	350	53	70	410	112	1003	120
VB 390.32.1.32.S	450	390	350	53	70	470	112	1004	140
VB 390.36.1.32.S	450	390	350	53	70	470	112	1004	140
VB 430.32.1.32.S	495	430	375	53	70	510	112	1049	105
VB 430.32.1.36,5.S	495	430	400	53	70	510	122	1084	155
VB 430.38.1.32.S	495	430	375	53	70	510	112	1049	105
VB 430.38.1.36,5.S	495	430	400	53	70	510	122	1084	155
VB 520.38.1.55.S	595	520	460	59	78	610	142	1280	310
VB 520.44.1.55.S	595	520	460	59	78	610	142	1280	310
VB 520.52.1.55.S	595	520	460	59	80	610	142	1280	310
VB 630.58.1.75.S	750	630	570	73	80	770	202	1815	575
VB 710.68.1.100.S	800	710	650	86	120	820	202	1910	730
VB 800.76.1.125.S	890	800	750	86	120	920	202	2150	1000

Minimum Ultimate Strength = 4 x WLL.

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.