
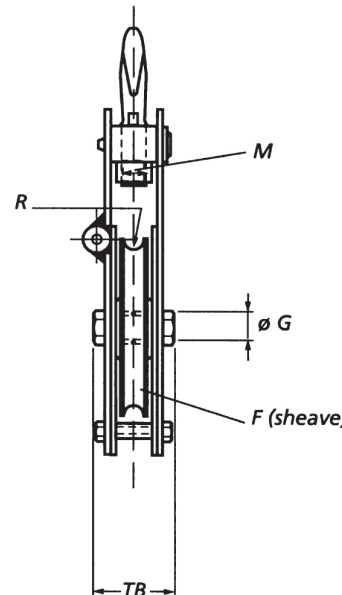


Snatch blocks self locking with hook

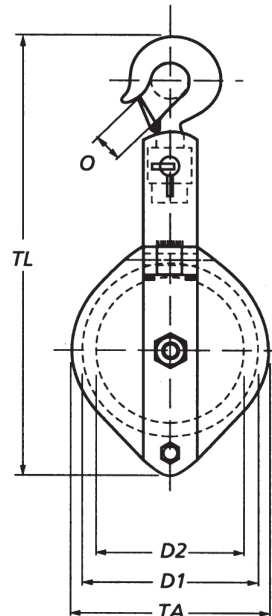

■ Becket

Model No. (+B for w. becket)	Stock No.	WLL (t)	for wire ød (mm)	Dimensions (mm)										Weight (kg)
				D1	D2	F	Ø G	M	R	O	TA	TB	TL	
VBK 120.12.1.2.H	12.150.02.14	2	12	150	120	40	30	24	35	6,5	170	100	425	8
VBK 165.14.1.3.H	12.200.03.14	3	14	200	165	40	30	30	42	7,5	220	100	560	12,5
VBK 210.18.1.4.H	12.250.04.14	4	18	250	210	45	35	33	42	9,5	270	110	655	21

Minimum Ultimate Strength = 4 x WLL.

WLL= Working Load Limit on head fitting.

- Groove in sheave may be adjusted to other wire rope diameters.
- Standard supplied with bronze bearings. Other bearings available on request.
- Snatch blocks may be supplied with becket.

WARNING!: These snatch blocks should never be used as lower block for hoisting.