



Standard Reeve Crane Blocks

1 sheave

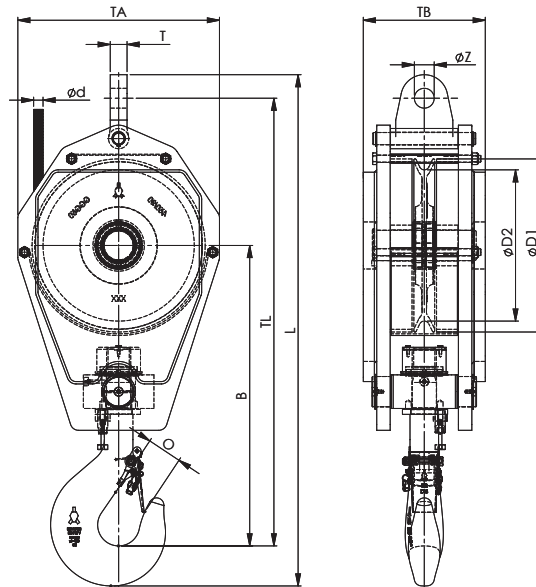

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL	For wire ød	Hook size	Dimensions (mm)										Weight (kg)
	Mtons	mm		øD1	øD2	B	O	TA	TB	TL	L	T	øZ	
SRB 225.14.1.12.5.E	12,5	14	5	260	225	523	55	345	170	798	913	28	32	75
SRB 225.14.1.16.E	16	14	5	260	225	548	55	345	180	823	938	28	32	100
SRB 260.14.1.12.5.E	12,5	14	5	300	260	548	55	400	185	833	948	28	32	110
SRB 260.16.1.12.5.E	12,5	16	5	300	260	548	55	400	185	833	948	28	32	110
SRB 260.16.1.16.E	16	16	5	300	260	548	55	400	185	833	948	28	32	110
SRB 285.16.1.16.E	16	16	6	320	280	608	57	420	165	908	1033	28	32	160
SRB 320.16.1.16.E	16	16	6	365	320	628	59	450	205	951	1076	28	32	160
SRB 320.19.1.16.E	16	19	6	365	320	628	59	450	205	951	1081	35	37	160
SRB 355.16.1.16.E.A	16	16	6	410	355	668	59	500	195	1013	1138	28	32	180
SRB 355.19.1.16.E	16	19	6	410	355	668	59	500	195	1013	1138	28	32	180
SRB 355.19.1.20.E	20	19	10	410	355	713	76	500	225	1053	1204	35	37	225
SRB 400.22.1.29.E	29	22	8	460	400	743	69	570	240	1128	1273	40	43	290
SRB 450.24.1.32.E.A	32	24	10	515	450	833	76	600	350	1256	1422	45	52	455
SRB 450.24.1.32.E.B	32	24	10	515	450	833	76	600	410	1256	1422	45	52	590
SRB 450.26.1.32.E.A	32	26	10	515	450	833	76	600	350	1256	1422	45	52	455
SRB 450.26.1.32.E.B	32	26	10	515	450	833	76	600	410	1256	1422	45	52	590
SRB 450.24.1.40.E.B	40	24	12	515	450	1074	84	600	410	1487	1665	45	52	590
SRB 450.26.1.40.E	40	26	12	515	450	918	84	605	323	1338	1516	45	52	590
SRB 528.24.1.50.E	50	24	16	596	528	934	97	710	353	1412	1604	45	52	725
SRB 528.26.1.50.E	50	26	16	596	528	934	97	710	353	1412	1604	45	52	725
SRB 528.28.1.50.E	50	28	16	595	528	934	97	710	353	1412	1614	50	59	725
SRB 575.28.1.50.E	50	28	16	650	575	958	97	770	333	1459	1661	50	59	930
SRB 630.32.1.63.E	63	32	16	720	630	985	97	825	353	1521	1728	60	66	1000
SRB 670.28.1.63.E	63	28	16	760	670	1173	97	870	473	1738	1940	50	59	1800
SRB 670.32.1.63.E	63	32	16	760	670	1173	97	870	473	1738	1945	60	66	1800

Minimum Ultimate Strength = 4 x WLL.

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size ■ Hook locking pin included on all blocks 40M ton and higher

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.