

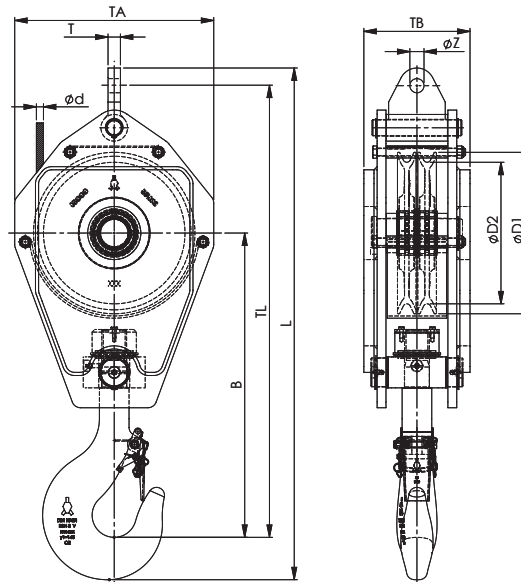


Standard Reeve Crane Blocks

2 sheaves

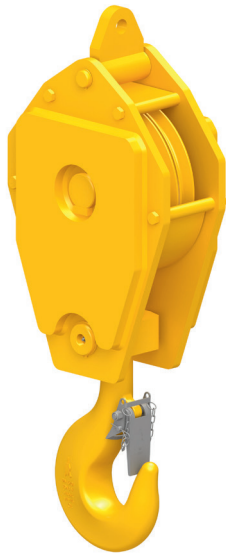

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL	For wire ød	Hook size	Dimensions (mm)										Weight (kg)
	Mtons	mm		øD1	øD2	B	O	TA	TB	TL	L	T	øZ	
SRB 260.14.2.16.E	16	14	6	300	260	593	59	400	166	878	1003	28	32	130
SRB 260.16.2.16.E	16	16	6	300	260	593	59	400	166	878	1003	28	32	130
SRB 285.16.2.16.E	16	16	6	320	280	608	59	420	165	908	1033	28	32	95
SRB 285.16.2.20.E.A	20	16	8	320	280	668	69	420	165	968	1103	28	32	130
SRB 285.16.2.20.E.B	20	16	8	320	280	668	69	420	195	968	1103	28	32	150
SRB 320.16.2.20.E	20	16	8	365	320	688	69	450	195	1011	1146	28	32	160
SRB 320.16.2.25.E	25	16	8	365	320	688	69	450	240	1011	1146	28	32	205
SRB 355.19.2.29.E	29	19	8	410	355	713	69	500	245	1063	1203	35	37	250
SRB 400.22.2.29.E	29	22	8	460	400	743	69	570	250	1128	1273	40	43	320
SRB 450.24.2.40.E	40	24	12	515	450	894	84	600	333	1322	1477	45	52	550
SRB 450.26.2.50.E	50	26	16	515	450	894	97	600	333	1322	1514	45	52	550
SRB 528.26.2.63.E	63	26	16	595	528	1003	97	710	403	1483	1675	45	52	980
SRB 528.28.2.80.E	80	28	20	595	528	1109	110	710	413	1589	1809	50	59	1000
SRB 670.28.2.100.E	100	28	20	760	670	1257	110	870	502	1822	2042	50	59	2240
SRB 670.32.2.100.E	100	32	20	760	670	1257	110	870	502	1822	2047	60	66	2240

Minimum Ultimate Strength = 4 x WLL.

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size ■ Hook locking pin included on all blocks 40M ton and higher

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.