


## Standard Reeve Crane Blocks

3 sheaves

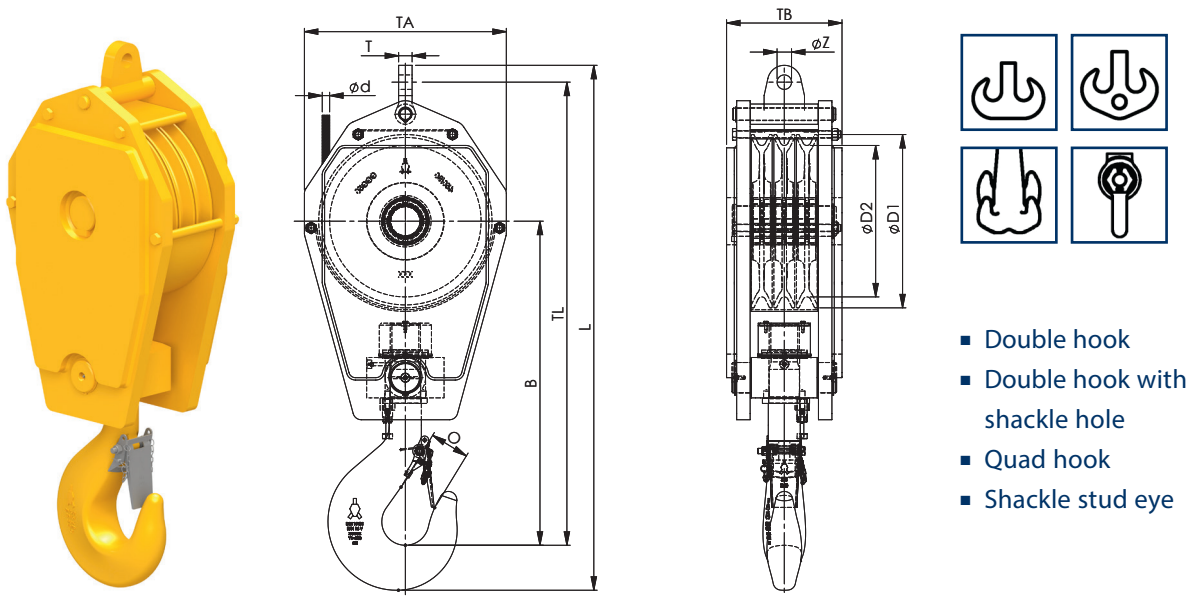

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

| Model Nr.          | WLL   | For wire ød | Hook size | Dimensions (mm) |     |      |     |     |     |      |      |    |    | Weight (kg) |
|--------------------|-------|-------------|-----------|-----------------|-----|------|-----|-----|-----|------|------|----|----|-------------|
|                    | Mtons | mm          |           | øD1             | øD2 | B    | O   | TA  | TB  | TL   | L    | T  | øZ |             |
| SRB 260.14.3.25.E  | 25    | 14          | 8         | 300             | 260 | 658  | 69  | 400 | 260 | 953  | 1088 | 28 | 32 | 210         |
| SRB 260.16.3.25.E  | 25    | 16          | 8         | 300             | 260 | 658  | 69  | 400 | 260 | 953  | 1088 | 28 | 32 | 210         |
| SRB 285.16.3.29.E  | 29    | 16          | 8         | 325             | 285 | 668  | 69  | 400 | 270 | 978  | 1113 | 28 | 32 | 210         |
| SRB 320.16.3.29.E  | 29    | 16          | 8         | 365             | 320 | 713  | 69  | 450 | 240 | 1048 | 1183 | 28 | 32 | 225         |
| SRB 355.19.3.32.E  | 32    | 19          | 10        | 410             | 355 | 753  | 76  | 500 | 262 | 1093 | 1244 | 35 | 37 | 325         |
| SRB 360.19.3.40.E  | 40    | 19          | 12        | 410             | 360 | 839  | 84  | 500 | 362 | 1179 | 1342 | 35 | 37 | 455         |
| SRB 400.22.3.40.E  | 40    | 22          | 12        | 460             | 400 | 864  | 84  | 570 | 353 | 1244 | 1412 | 40 | 43 | 500         |
| SRB 400.22.3.50.E  | 50    | 22          | 16        | 460             | 400 | 864  | 97  | 570 | 353 | 1244 | 1426 | 40 | 43 | 500         |
| SRB 400.22.3.50.E  | 50    | 22          | 16        | 460             | 400 | 864  | 97  | 570 | 373 | 1244 | 1426 | 40 | 43 | 540         |
| SRB 450.22.3.63.E  | 63    | 22          | 16        | 515             | 450 | 963  | 97  | 600 | 343 | 1376 | 1558 | 40 | 43 | 680         |
| SRB 450.24.3.63.E  | 63    | 24          | 16        | 515             | 450 | 963  | 97  | 600 | 383 | 1376 | 1568 | 45 | 52 | 770         |
| SRB 450.26.3.63.E  | 63    | 26          | 16        | 515             | 450 | 963  | 97  | 600 | 383 | 1376 | 1568 | 45 | 52 | 770         |
| SRB 528.26.3.80.E  | 80    | 24          | 20        | 595             | 528 | 1132 | 110 | 710 | 462 | 1612 | 1822 | 45 | 52 | 1270        |
| SRB 528.26.3.80.E  | 80    | 26          | 20        | 595             | 528 | 1132 | 110 | 710 | 462 | 1612 | 1822 | 45 | 52 | 1270        |
| SRB 528.26.3.100.E | 100   | 26          | 25        | 595             | 528 | 1223 | 132 | 710 | 462 | 1683 | 1913 | 45 | 52 | 1270        |
| SRB 528.28.3.100.E | 100   | 28          | 25        | 595             | 528 | 1223 | 132 | 710 | 462 | 1683 | 1923 | 50 | 59 | 1270        |
| SRB 670.28.3.125.E | 125   | 28          | 25        | 760             | 670 | 1353 | 132 | 870 | 642 | 1918 | 2158 | 50 | 59 | 2900        |
| SRB 670.32.3.125.E | 125   | 32          | 25        | 760             | 670 | 1353 | 132 | 870 | 642 | 1918 | 2163 | 60 | 66 | 2900        |

Minimum Ultimate Strength = 4 x WLL.

**NOTE** xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size ■ Hook locking pin included on all blocks 40M ton and higher

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.