

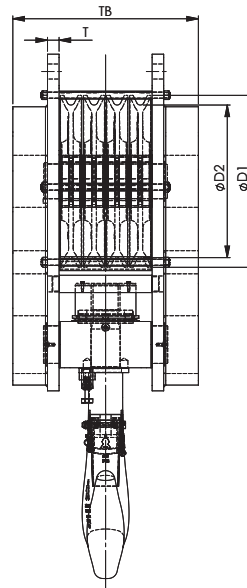
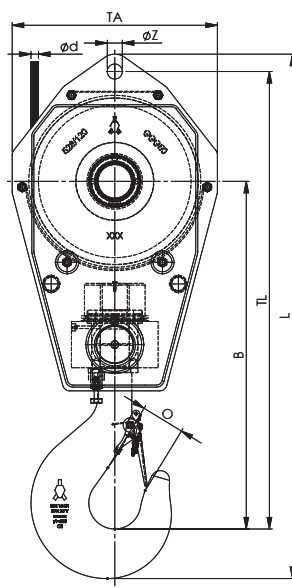


Standard Reeve Crane Blocks

4 sheaves

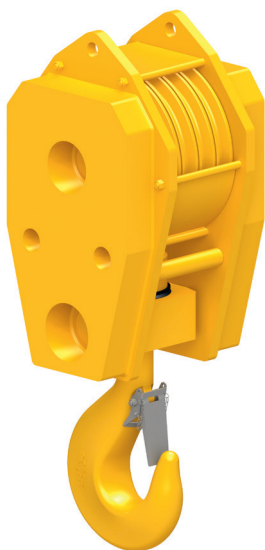

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL UStons	For wire ød inch	Hook size	Dimensions (inch)										Weight lbs
				øD1	øD2	B	O	TA	TB	TL	L	T	øZ	
SRB 285.xx.4.35.E	38,5	1/2 - 3/4	10	12.8	11.2	26.0	3.5	15.7	13.6	36.2	40.4	TBD	TBD	570
SRB 355.xx.4.50.E	55	5/16 - 7/8	16	16.1	14.0	33.0	4.4	19.7	15.4	43.9	50.8	TBD	TBD	1045
SRB 528.xx.4.55.E	60	7/8 - 1 1/4	12	23.5	20.8	38.5	3.9	28.0	21.7	53.5	60.6	TBD	TBD	2600
SRB 400.xx.4.64.E	70	5/8 - 1	16	18.1	15.7	35.6	4.4	22.4	14.7	47.2	54.4	TBD	TBD	1155
SRB 450.xx.4.64.E	70	3/4 - 1 1/8	16	20.3	17.7	38.0	4.4	23.6	16.3	52.0	59.2	TBD	TBD	1595
SRB 528.xx.4.70.E	77	7/8 - 1 1/4	16	23.5	20.8	40.4	4.4	28.0	20.9	55.3	63.0	TBD	TBD	2850
SRB 450.xx.4.82.E	90	3/4 - 1 1/8	20	20.3	17.7	41.2	4.9	23.6	19.4	51.6	59.8	TBD	TBD	2110
SRB 450.xx.4.100.E	110	3/4 - 1 1/8	25	20.3	17.7	46.8	5.5	23.6	23.7	60.2	68.9	TBD	TBD	3200
SRB 528.xx.4.55.E	60	7/8 - 1 1/4	12	23.4	20.8	38.5	3.9	28.0	21.7	53.5	60.6	TBD	TBD	2600
SRB 528.xx.4.105.E	115,5	7/8 - 1 1/4	25	23.4	20.8	48.1	5.5	28.0	20.2	62.7	71.8	TBD	TBD	3900
SRB 670.xx.4.160.E	176	1 - 1 3/8	40	29.9	26.4	60.7	7.1	34.3	26.9	82.9	94.0	TBD	TBD	6930
SRB 710.xx.4.105.E	115,5	1 1/8 - 1 1/2	25	31.5	28.0	53.3	5.5	35.4	17.4	73.9	84.4	TBD	TBD	3000

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size

Minimum Ultimate Strength = 4 x WLL.

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Hook locking pin included on all blocks 40M ton and higher