

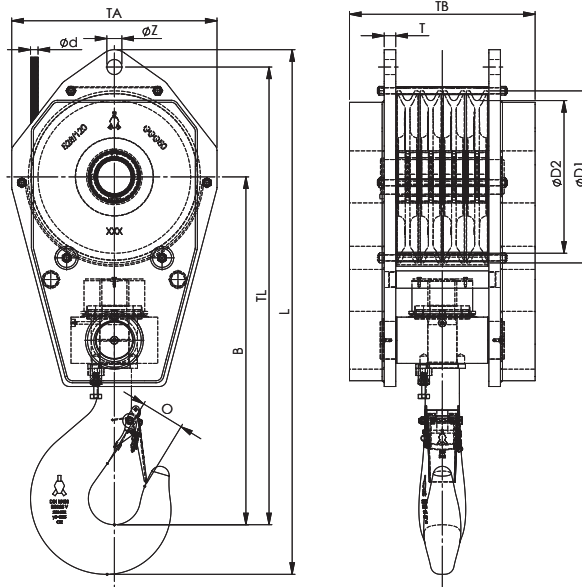


Standard Reeve Crane Blocks

4 sheaves

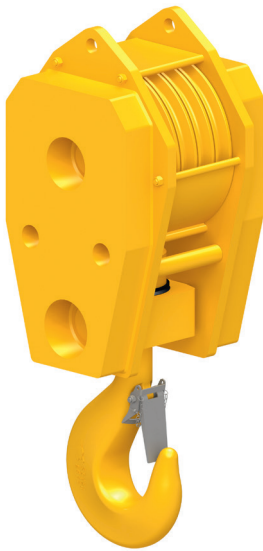

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL	For wire ød	Hook size	Dimensions (mm)										Weight (kg)
	Mtons	mm		øD1	øD2	B	O	TA	TB	TL	L	T	øZ	
SRB 285.16.4.35.E	35	16	10	325	285	660	76	400	346	920	1026	28	32	260
SRB 355.19.4.50.E	50	19	16	410	355	839	97	500	392	1114	1291	35	37	475
SRB 400.22.4.63.E	63	22	16	460	400	905	97	570	373	1200	1382	40	43	525
SRB 450.22.4.63.E	63	22	16	515	450	965	97	600	413	1321	1503	40	43	725
SRB 450.24.4.80.E	80	24	20	515	450	1047	110	600	493	1310	1520	45	52	960
SRB 450.26.4.80.E	80	26	20	515	450	1047	110	600	493	1310	1520	45	52	960
SRB 528.26.4.100.E	100	26	25	595	528	1223	132	710	512	1593	1823	45	52	1250
SRB 528.28.4.100.E	100	28	25	595	528	1223	132	710	512	1593	1833	50	59	1250
SRB 670.28.4.160.E	160	28	40	760	670	1541	167	870	682	2106	2388	50	59	3150
SRB 670.32.4.160.E	160	32	40	760	670	1541	167	870	682	2106	2393	60	66	3150

Minimum Ultimate Strength = 4 x WLL.

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size ■ Hook locking pin included on all blocks 40M ton and higher

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.