

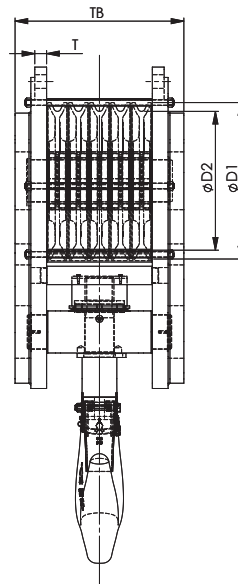
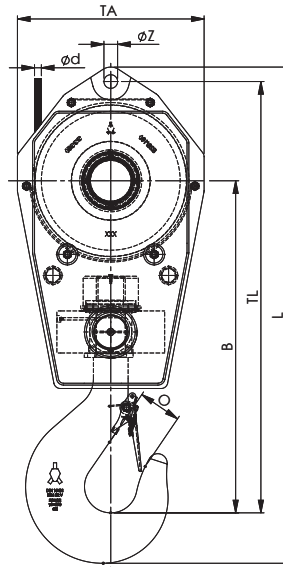


## Standard Reeve Crane Blocks

5 sheaves

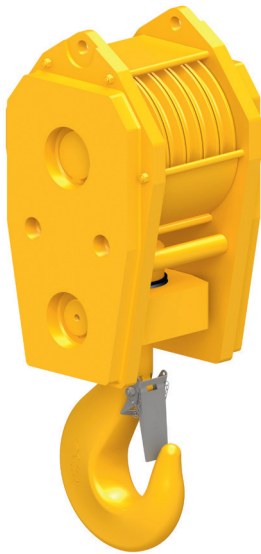

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

| Model Nr.            | WLL    | For wire ød                     | Dimensions (inch) |      |      |     |      |      |      |      |     |     | Weight |
|----------------------|--------|---------------------------------|-------------------|------|------|-----|------|------|------|------|-----|-----|--------|
|                      | UStons | inch                            | øD1               | øD2  | B    | O   | TA   | TB   | TL   | L    | T   | øZ  | lbs    |
| SRB 355.xx.5.55.E    | 60     | $\frac{5}{16}$ - $\frac{3}{8}$  | 16.1              | 14.0 | 33.0 | 4.4 | 19.7 | 17.4 | 44.6 | 51.4 | TBD | TBD | 1100   |
| SRB 360.xx.5.64.E    | 70     | $\frac{3}{8}$ - $\frac{7}{8}$   | 16.1              | 14.2 | 39.1 | 4.4 | 19.7 | 17.2 | 47.2 | 54.1 | TBD | TBD | 1320   |
| SRB 360.xx.5.80.E    | 88     | $\frac{3}{8}$ - $\frac{7}{8}$   | 16.1              | 14.2 | 39.1 | 4.9 | 19.7 | 21.2 | 50.5 | 58.1 | TBD | TBD | 1805   |
| SRB 400.xx.5.80.E    | 88     | $\frac{5}{8}$ - 1               | 18.1              | 15.7 | 40.7 | 4.9 | 22.4 | 21.3 | 53.7 | 61.6 | TBD | TBD | 1835   |
| SRB 400.xx.5.73.E    | 80     | $\frac{5}{8}$ - 1               | 18.1              | 15.7 | 37.6 | 4.4 | 22.4 | 19.8 | 49.6 | 56.7 | TBD | TBD | 1650   |
| SRB 400.xx.5.82.E    | 90     | $\frac{5}{8}$ - 1               | 18.1              | 15.7 | 40.7 | 4.9 | 22.4 | 21.3 | 53.7 | 61.6 | TBD | TBD | 1800   |
| SRB 450.xx.5.82.E    | 90     | $\frac{3}{4}$ - 1 $\frac{1}{8}$ | 20.3              | 17.7 | 42.2 | 4.9 | 23.6 | 21.9 | 56.3 | 64.2 | TBD | TBD | 2250   |
| SRB 450.xx.5.100.E   | 110    | $\frac{3}{4}$ - 1 $\frac{1}{8}$ | 20.3              | 17.7 | 44.4 | 5.5 | 23.6 | 21.9 | 58.5 | 67.6 | TBD | TBD | 2500   |
| SRB 528.xx.5.125.E   | 137.5  | $\frac{7}{8}$ - 1 $\frac{1}{4}$ | 23.4              | 20.8 | 49.7 | 6.3 | 28.0 | 25.3 | 66.8 | 76.6 | TBD | TBD | 3500   |
| SRB 528.xx.5.137.5.E | 150    | $\frac{7}{8}$ - 1 $\frac{1}{4}$ | 23.4              | 20.8 | 52.5 | 6.3 | 28.0 | 21.7 | 50.1 | 77.8 | TBD | TBD | 3500   |
| SRB 528.xx.5.160.E   | 176    | $\frac{7}{8}$ - 1 $\frac{1}{4}$ | 23.4              | 20.8 | 55.4 | 7.1 | 28.0 | 22.1 | 70.7 | 81.8 | TBD | TBD | 3640   |
| SRB 670.xx.5.200.E   | 220    | 1 - 1 $\frac{3}{8}$             | 29.9              | 26.4 | 64.6 | 7.9 | 34.3 | 31.6 | 83.9 | 95.9 | TBD | TBD | 7830   |

**NOTE** xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size

Minimum Ultimate Strength = 4 x WLL.

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.
- Hook locking pin included on all blocks 40M ton and higher