

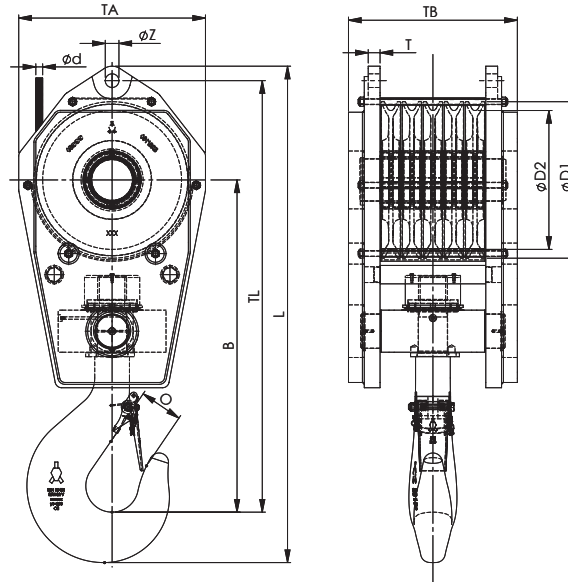


Standard Reeve Crane Blocks

5 sheaves

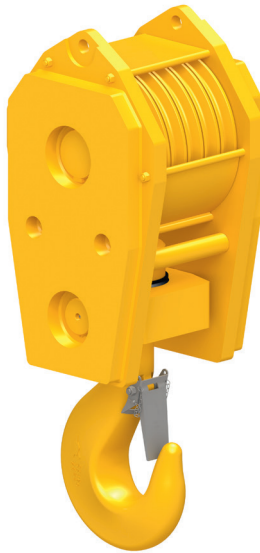

- Double hook
- Double hook with shackle hole
- Quad hook
- Shackle stud eye

Model Nr.	WLL	For wire ød	Hook size	Dimensions (mm)										Weight (kg)
	Mtons	mm		øD1	øD2	B	O	TA	TB	TL	L	T	øZ	
SRB 355.16.5.50.E	50	16	16	410	355	838	97	500	442	1133	1305	28	32	500
SRB 360.19.5.63.E	63	19	16	410	360	992	97	500	438	1198	1375	35	37	600
SRB 360.19.5.80.E	80	19	20	410	360	992	110	500	538	1282	1477	35	37	820
SRB 400.19.5.80.E	80	19	20	460	400	1034	110	570	542	1364	1564	40	37	835
SRB 400.22.5.80.E	80	22	20	460	400	1034	110	570	542	1364	1564	40	43	835
SRB 450.22.5.80.E	80	22	20	515	450	1073	110	600	555	1431	1631	40	43	1025
SRB 450.24.5.100.E	100	24	25	515	450	1128	132	600	555	1486	1716	45	52	1120
SRB 450.26.5.100.E	100	26	25	515	450	1128	132	600	555	1486	1716	45	52	1120
SRB 528.24.5.125.E	125	24	32	595	528	1263	137	710	642	1696	1946	45	52	1820
SRB 528.26.5.125.E	125	26	32	595	528	1263	137	710	642	1696	1946	45	52	1820
SRB 528.28.5.125.E	125	26	32	595	528	1263	137	710	642	1696	1956	50	59	1850
SRB 528.28.5.160.E	160	28	40	595	528	1406	167	710	562	1796	2078	50	59	1820
SRB 670.28.5.200.E	200	28	50	760	670	1641	188	870	802	2131	2437	50	59	3560
SRB 670.32.5.200.E	200	32	50	760	670	1641	188	870	802	2131	2442	60	66	3560

Minimum Ultimate Strength = 4 x WLL.

NOTE xx = To be replaced by metric wire size in final part number ■ TBD = These dimensions vary with wire size ■ Hook locking pin included on all blocks 40M ton and higher

- The dimensions in this table are indicative only. A drawing will always be submitted prior to production and will be the leading document when discussing dimensions.
- Blocks shown here are standard models; inquiries for custom versions are welcome.
- Refer to wire rope manufacturers D/d ratio guideline.