
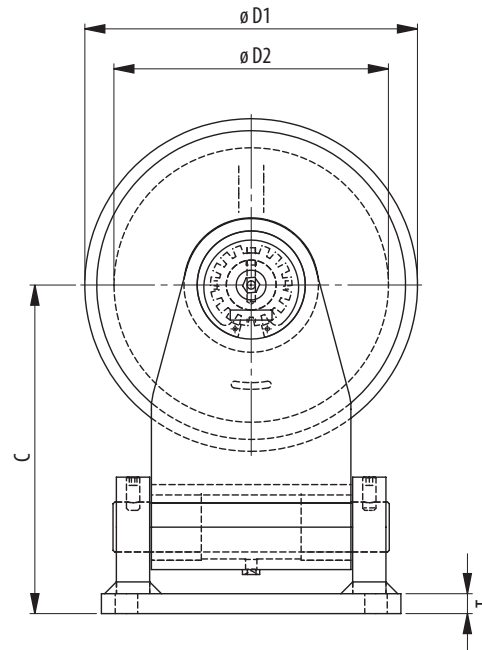
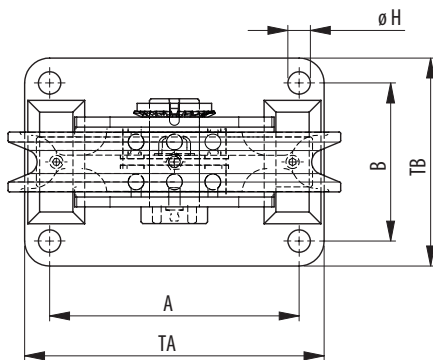
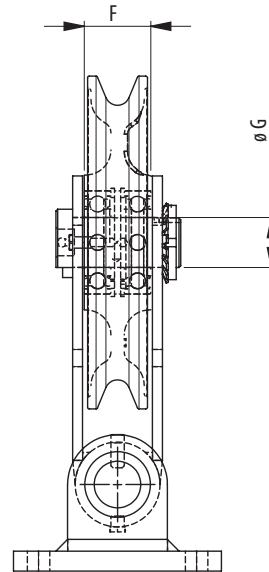


Flag directional blocks >>

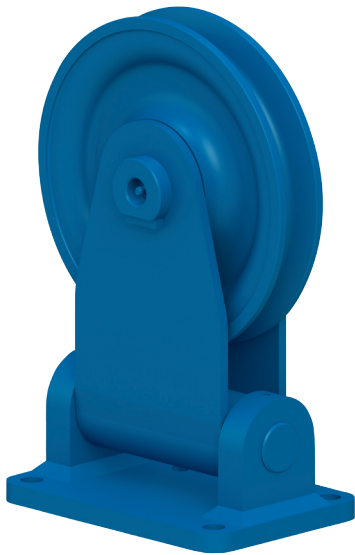

Bronze bushing




Model No.	Stock No.	WLL (t)	for wire ød (mm)	Bearing	Dimensions (mm)											Weight (kg)
					D1	D2	A	B	C	F	G	H	T	TA	TB	
FLS 105.10.1.1-BR	25.125.01.50	1	10	Bronze	125	105	90	70	128	27	22	9	8	115	95	3,5
FLS 120.12.1.2-BR	25.150.02.50	2	12	Bronze	150	120	115	85	160	40	30	11	10	140	110	6,5
FLS 165.14.1.3-BR	25.200.03.50	3	14	Bronze	200	165	150	95	197	40	30	13,5	12	180	125	11
FLS 210.18.1.4-BR	25.250.04.50	4	18	Bronze	250	210	190	120	240	45	35	17,5	15	230	160	21
FLS 255.20.1.6-BR	25.300.06.50	6	20	Bronze	300	255	220	150	295	50	40	22	20	270	200	33
FLS 305.22.1.8-BR	25.350.08.50	8	22	Bronze	350	305	270	160	350	50	45	26	25	330	220	52
FLS 345.24.1.10-BR	25.400.10.50	10	24	Bronze	400	345	300	190	400	60	50	32	30	370	260	80

WLL= Working Load Limit.

- No test certificate possible.
- Groove in sheave may be adjusted to other wire rope diameters.
- Minimum Ultimate Strength = FoS up to 4 on the WLL, depending on loading condition.

SEE OUR WARNINGS AND APPLICATION INSTRUCTIONS

<< Flag directional blocks

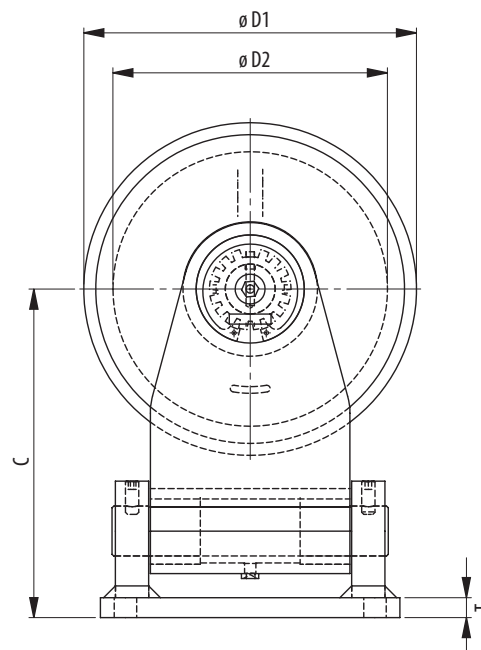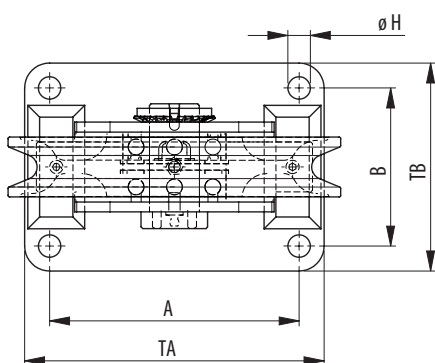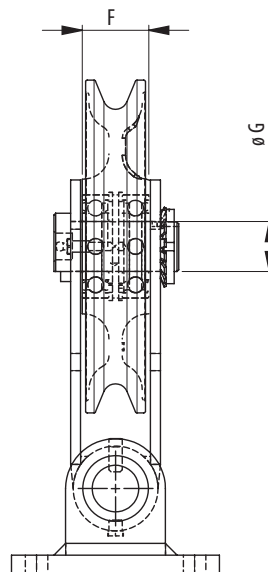

Ball or cylindrical roller bearing

Model No.	Stock No.	WLL (t)	for wire ød (mm)	Bearing	Dimensions (mm)											Weight (kg)
					D1	D2	A	B	C	F	G	H	T	TA	TB	
FLS 105.10.1.1	25.125.01.51	1	10	2 x Ball	125	105	90	70	128	27	22	9	8	115	95	3,5
FLS 120.12.1.2	25.150.02.51	2	12	2 x Ball	150	120	115	85	160	40	30	11	10	140	110	6,5
FLS 165.14.1.3	25.200.03.51	3	14	2 x Ball	200	165	150	95	197	40	30	13,5	12	180	125	11
FLS 210.18.1.4	25.250.04.51	4	18	Straight	250	210	190	120	240	45	35	17,5	15	230	160	21
FLS 255.20.1.6	25.300.06.51	6	20	Straight	300	255	220	150	295	50	40	22	20	270	200	33
FLS 305.22.1.8	25.350.08.51	8	22	Straight	350	305	270	160	350	50	45	26	25	330	220	52
FLS 345.24.1.10	25.400.10.51	10	24	Straight	400	345	300	190	400	60	50	32	30	370	260	80

WLL= Working Load Limit.

- No test certificate possible.
- Groove in sheave may be adjusted to other wire rope diameters.
- Minimum Ultimate Strength = FoS up to 4 on the WLL, depending on loading condition.