
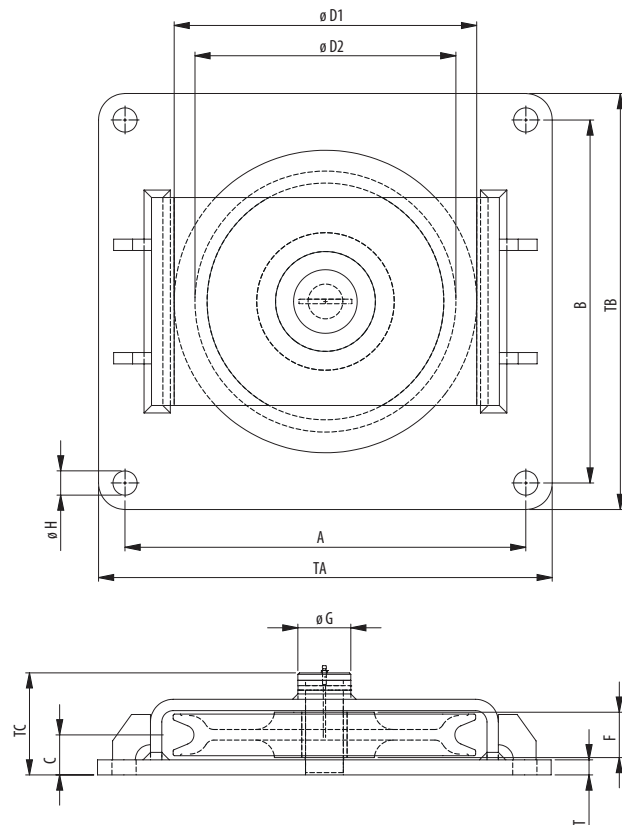


Horizontal directional blocks

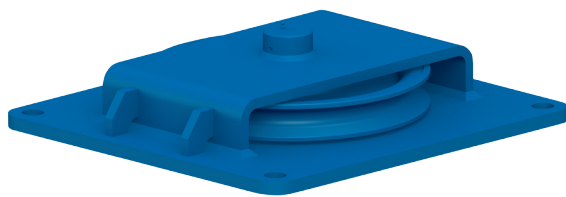

Bronze bushing

Model No.	Stock No.	WLL (t)	Wire size up to (mm)	Bearing	Dimensions (mm)												Weight (kg)
					ØD1	ØD2	A	B	C	F	ØG	H	T	TA	TB	TC	
HLS 105.10.1.1-BR	25.125.01.70	1	10	Bronze	125	105	180	150	22,5	27	22	9	8	200	170	54	5
HLS 120.12.1.2-BR	25.150.02.70	2	12	Bronze	150	120	220	190	31	40	30	11	10	250	220	72	10
HLS 165.14.1.3-BR	25.200.03.70	3	14	Bronze	200	165	290	240	33	40	30	13,5	12	320	270	76	17
HLS 210.18.1.4-BR	25.250.04.70	4	18	Bronze	250	210	360	310	38,5	45	35	17,5	15	400	350	86	32
HLS 255.20.1.6-BR	25.300.06.70	6	20	Bronze	300	255	400	360	46	50	40	22	20	450	410	99	50
HLS 305.22.1.8-BR	25.350.08.70	8	22	Bronze	350	305	460	420	46	50	45	26	20	520	480	99	70
HLS 345.24.1.10-BR	25.400.10.70	10	24	Bronze	400	345	530	480	51	60	50	32	20	600	550	113	100

Minimum Ultimate Strength = 4 x WLL.

Ball or cylindrical roller bearing

Model No.	Stock No.	WLL (t)	Wire size up to (mm)	Bearing	Dimensions (mm)												Weight (kg)
					ØD1	ØD2	A	B	C	F	ØG	H	T	TA	TB	TC	
HLS 105.10.1.1	25.125.01.71	1	10	2 x Ball	125	105	180	150	22,5	27	22	9	8	200	170	54	5
HLS 120.12.1.2	25.150.02.71	2	12	2 x Ball	150	120	220	190	31	40	30	11	10	250	220	72	10
HLS 165.14.1.3	25.200.03.71	3	14	2 x Ball	200	165	290	240	33	40	30	13,5	12	320	270	76	17
HLS 210.18.1.4	25.250.04.71	4	18	Straight	250	210	360	310	38,5	45	35	17,5	15	400	350	86	32
HLS 255.20.1.6	25.300.06.71	6	20	Straight	300	255	400	360	46	50	40	22	20	450	410	99	50
HLS 305.22.1.8	25.350.08.71	8	22	Straight	350	305	460	420	46	50	45	26	20	520	480	99	70
HLS 345.24.1.10	25.400.10.71	10	24	Straight	400	345	530	480	51	60	50	32	20	600	550	113	100

Minimum Ultimate Strength = 4 x WLL.

WLL= Working Load Limit.

- No test certificate possible.
- Groove in sheave may be adjusted to other wire rope diameters.