


Tough duty Sheaves with ball bearings

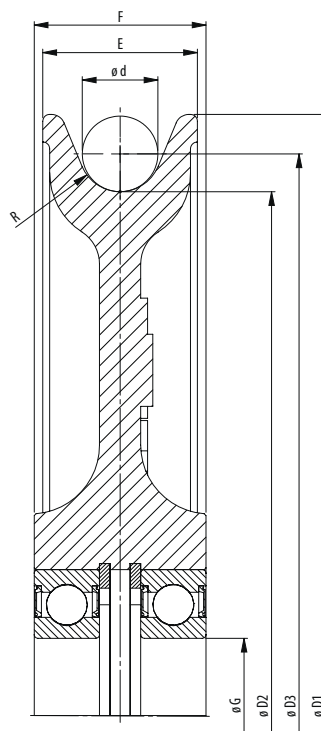

Model No.	Stock No.	for wire ød (mm)	Dimensions (mm)							Bearing	Weight (kg)
			ØD1	ØD2	ØD3	E	F	ØG	R		
SEF.80.6002.4,5	31.100.60.02	8	100	80	88	18	20	15	4,5	2x6002-RS	0,7
SEF.105.60-22.5,5	31.125.60.02	10	125	105	115	23	27,5	22	5,5	2x60/22-RS	1,5
SEF.120.6206.6,5	31.150.60.02	12	150	120	132	36	40	30	6,5	2x6206-RS	3
SEF.165.6206.7,5	31.200.60.02	14	200	165	179	36	40	30	7,5	2x6206-RS	4,5
SEF.210.6207.9,5	31.250.60.02	18	250	210	228	40	45	35	9,5	2x6207-RS	8
SEF.255.6208.11	31.300.60.02	20	300	255	275	45	50	40	11,0	2x6208-RS	12
SEF.305.6209.12	31.350.60.02	22	350	305	327	45	50	45	12,0	2x6209-RS	17
SEF.345.6210.13	31.400.70.02 = 31.400.60.02	24	400	345	369	55	60	50	13,0	2x6210-RS	24

- Different shaft sizes possible.
- Groove may be adjusted to other wire rope diameters.