


Tough duty Sheaves with bronze bushing

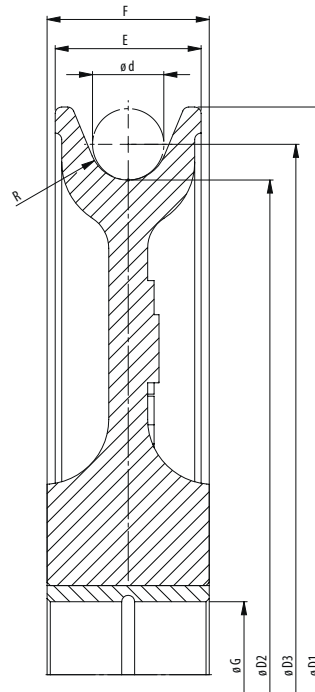

Extra thick cross sections

Model No.	Stock No.	for wire ød (mm)	Dimensions (mm)							Bearing	Weight (kg)
			ØD1	ØD2	ØD3	E	F	ØG	R		
SEF.80.15.20.4,5	31.100.60.01	8	100	80	88	18	20	15	4,5	Sinter Bronze	0,6
SEF.105.22.27.5,5	31.125.60.01	10	125	105	115	23	27	22	5,5	Bronze	1,5
SEF.120.30.40.6,5	31.150.60.01	12	150	120	132	36	40	30	6,5	Bronze	3
SEF.165.30.40.7,5	31.200.60.01	14	200	165	179	36	40	30	7,5	Bronze	4,5
SEF.210.35.45.9,5	31.250.60.01	18	250	210	228	40	45	35	9,5	Bronze	8
SEF.255.40.50.11	31.300.60.01	20	300	255	275	45	50	40	11,0	Bronze	12
SEF.305.45.50.12	31.350.70.01	22	350	305	327	45	50	45	12,0	Bronze	17
SEF.345.50.60.13	31.400.60.01	24	400	345	369	55	60	50	13,0	Bronze	24
SEF.390.55.70.15	31.450.70.01	28	450	390	418	60	70	55	15,0	Bronze	36
SEF.430.60.80.16	31.500.70.01	30	500	430	460	70	80	60	16,0	Bronze	44
SEF.480.70.80.18	31.550.70.01	34	550	480	514	70	80	70	18,0	Bronze	55
SEF.520.80.105.19,5	31.600.70.01	36	600	520	556	85	105	80	19,5	Bronze	80
SEF.560.100.110.20,5	31.665.70.01	38	665	560	598	100	110	100	20,5	Bronze	110
SEF.630.120.110.21,5	31.710.70.01	40	710	630	670	85	110	120	21,5	Bronze	125
SEF.710.150.130.23,5	31.810.60.01	44	810	710	754	98	130	150	23,5	Bronze	170
SEF.800.150.150.22	31.920.60.01	44	920	800	844	130	150	150	22,0	Bronze	270
SEF.920.160.150.22	31.1030.20.01	48	1030	920	968	130	150	160	22,0	Bronze	380
SEF.1020.180.160.24,5	31.1160.30.01	52	1160	1020	1072	140	160	180	24,5	Bronze	540

- Different shaft sizes possible.
- Groove may be adjusted to other wire rope diameters.