


Super reeve Connector Sockets with bolt and nut

Quenched and tempered cast steel

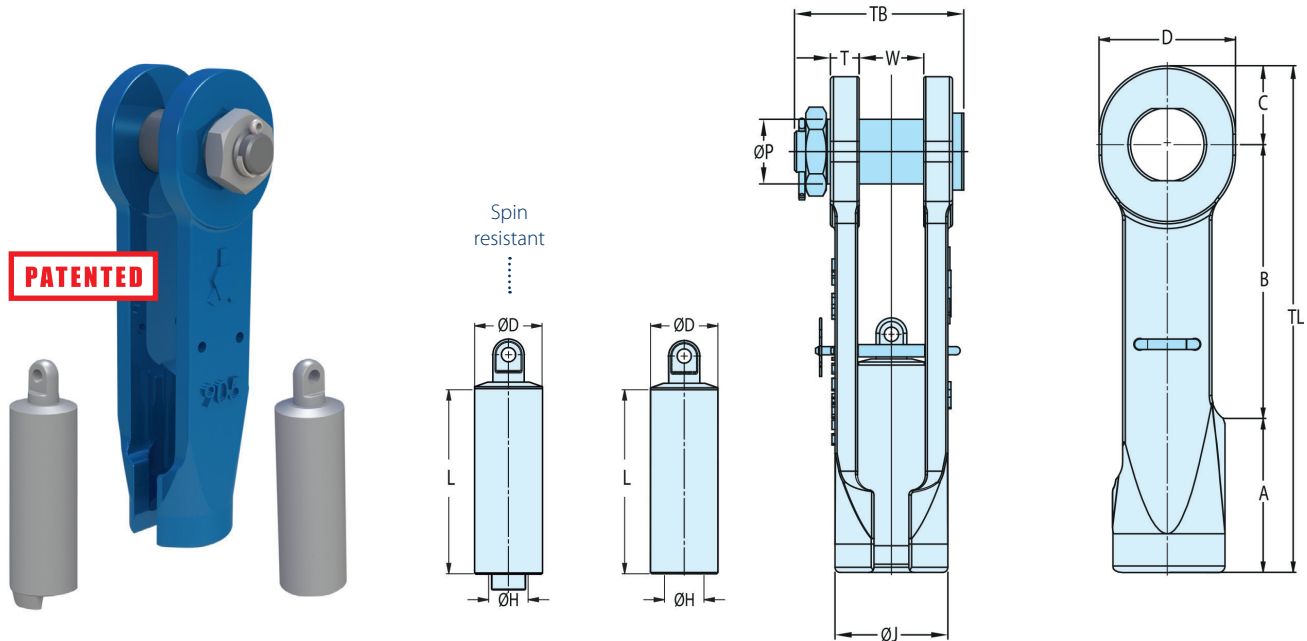

Model nr.	MBL (Mtons)	for wire Ø		Dimensions (mm)													Weight (kg)
		mm	inch	A	B	C	ØH	ØP	T	W	D	ØD	ØJ	L	TB	TL	
SCS 901 B	20	11-13	$\frac{7}{16} - \frac{1}{2}$	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SCS 902 B	25	13-16	$\frac{1}{2} - \frac{5}{8}$	85	133	32	19	30	14	32	58	32	56	98	96	250	3,1
SCS 903 B	40	16-19	$\frac{5}{8} - \frac{3}{4}$	90	160	40	22	35	16	38	70	40	65	114	107	290	4,8
SCS 904 B	55	20-22	$\frac{7}{8}$	107	184	45	26	41	19	44	80	44	77	130	123	336	8
SCS 905 B	75	23-26	1	115	211	60	31	50	22	51	104	52	88	142	138	386	12
SCS 906 B	90	27-29	$1\frac{1}{8}$	140	215	65	34	57	25	57	114	58	96	159	160	420	16
SCS 907 B	125	30-32	$1\frac{1}{4}$	150	260	73	36	63	28	63	126	64	110	177	165	483	23
SCS 908 B	125	33-36	$1\frac{3}{8}$	170	260	73	40	64	28	69	126	68	114	197	185	503	25
SCS 902 B.SR	25	13-16	$\frac{1}{2} - \frac{5}{8}$	85	133	32	19	30	14	32	58	32	56	98	96	250	3,1
SCS 903 B.SR	40	16-19	$\frac{5}{8} - \frac{3}{4}$	90	160	40	22	35	16	38	70	40	65	114	107	290	4,8
SCS 904 B.SR	55	20-22	$\frac{7}{8}$	107	184	45	26	41	19	44	80	44	77	130	123	336	8
SCS 905 B.SR	75	23-26	1	115	211	60	31	50	22	51	104	52	88	142	138	386	12
SCS 906 B.SR	90	27-29	$1\frac{1}{8}$	140	215	65	34	57	25	57	114	58	96	159	160	420	16
SCS 907 B.SR	125	30-32	$1\frac{1}{4}$	150	260	73	36	63	28	63	126	64	110	177	165	483	23
SCS 908 B.SR	125	33-36	$1\frac{3}{8}$	170	260	73	40	64	28	69	126	68	114	197	185	503	25
SCS 909 B.SR	150	37-39	$1\frac{1}{2}$	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SCS 910 B.SR	170	40-42	$1\frac{5}{8}$	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SCS 911 B.SR	225	43-48	$1\frac{3}{4} - 1\frac{7}{8}$	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SCS 912 B.SR	280	49-54	$2 - 2\frac{1}{8}$	225	373	108	60	95	45	101	194	105	185	280	263	706	93

MBL = Minimum Breaking Load

The standard finish of our sockets is blue. Hot dipped galvanized is also available. All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.