


Super reeve Connector Sockets with pin

Quenched and tempered cast steel

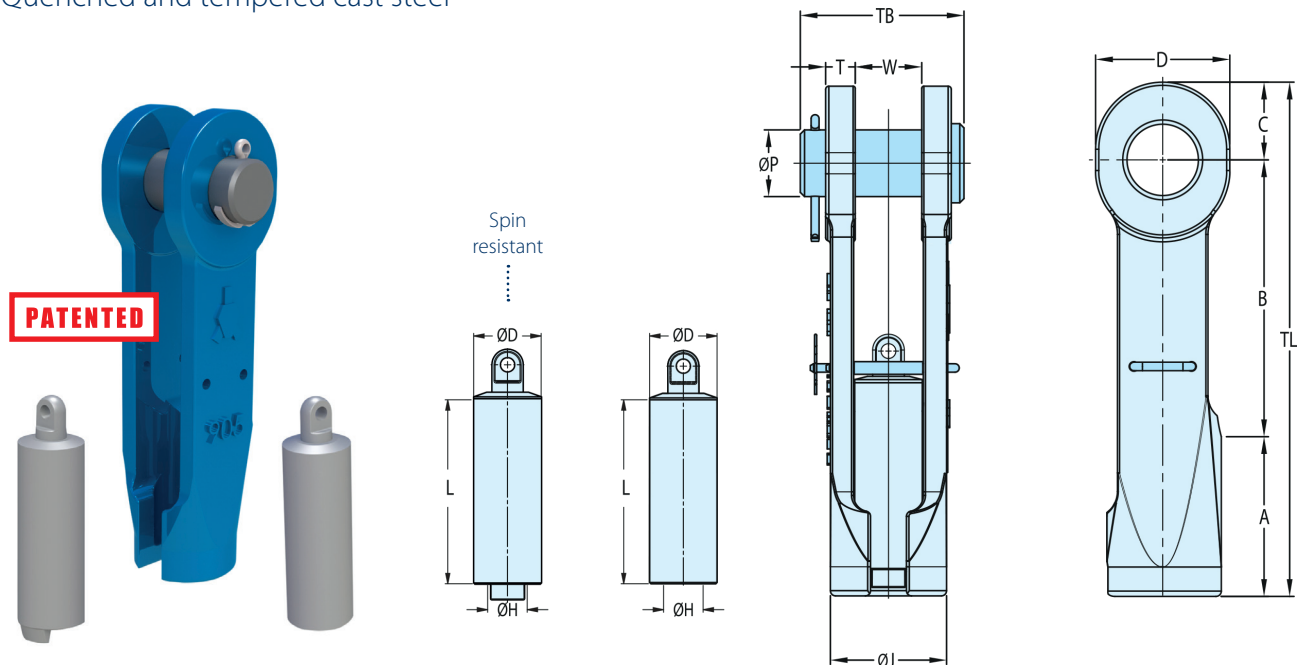

Model nr.	MBL (UStons)	for wire Ø		Dimensions (inch)													Weight (lbs)
		mm	inch	A	B	C	ØH	ØP	T	W	D	ØD	ØJ	L	TB	TL	
SCS 901 P	22	11-13	7/16 - 1/2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SCS 902 P	28	13-16	1/2 - 5/8	3 3/8	5 1/4	1 1/4	3/4	1 3/16	9/16	1 1/4	2 5/16	1 1/4	2 3/16	3 7/8	3 3/8	9 13/16	7
SCS 903 P	44	16-19	5/8 - 3/4	3 9/16	6 5/16	1 9/16	7/8	1 3/8	5/8	1 1/2	2 3/4	1 9/16	2 9/16	4 1/2	3 3/4	11 7/16	11
SCS 904 P	61	20-22	7/8	4 3/16	7 1/4	1 3/4	1	1 5/8	3/4	1 3/4	3 1/8	1 3/4	3 1/16	5 1/8	4 5/16	13 1/4	17
SCS 905 P	83	23-26	1	4 1/2	8 5/16	2 3/8	1 3/16	1 15/16	7/8	2	4 1/8	2 1/16	3 7/16	5 9/16	5 1/16	15 3/16	26
SCS 906 P	99	27-29	1 1/8	5 1/2	8 7/16	2 9/16	1 5/16	2 1/4	1	2 1/4	4 1/2	2 5/16	3 3/4	6 1/4	5 9/16	16 9/16	35
SCS 907 P	138	30-32	1 1/4	5 7/8	10 1/4	2 7/8	1 7/16	2 1/2	1 1/8	2 1/2	4 15/16	2 1/2	4 5/16	6 15/16	6 1/8	19	51
SCS 908 P	138	33-36	1 3/8	6 11/16	10 1/4	2 7/8	1 9/16	2 1/2	1 1/8	2 11/16	4 15/16	2 11/16	4 1/2	7 3/4	6 5/16	19 13/16	55
SCS 902 P.SR	28	13-16	1/2 - 5/8	3 3/8	5 1/4	1 1/4	3/4	1 3/16	9/16	1 1/4	2 5/16	1 1/4	2 3/16	3 7/8	3 3/8	9 13/16	7
SCS 903 P.SR	44	16-19	5/8 - 3/4	3 9/16	6 5/16	1 9/16	7/8	1 3/8	5/8	1 1/2	2 3/4	1 9/16	2 9/16	4 1/2	3 3/4	11 7/16	11
SCS 904 P.SR	61	20-22	7/8	4 3/16	7 1/4	1 3/4	1	1 5/8	3/4	1 3/4	3 1/8	1 3/4	3 1/16	5 1/8	4 5/16	13 1/4	17
SCS 905 P.SR	83	23-26	1	4 1/2	8 5/16	2 3/8	1 3/16	1 15/16	7/8	2	4 1/8	2 1/16	3 7/16	5 9/16	5 1/16	15 3/16	26
SCS 906 P.SR	99	27-29	1 1/8	5 1/2	8 7/16	2 9/16	1 5/16	2 1/4	1	2 1/4	4 1/2	2 5/16	3 3/4	6 1/4	5 9/16	16 9/16	35
SCS 907 P.SR	138	30-32	1 1/4	5 7/8	10 1/4	2 7/8	1 7/16	2 1/2	1 1/8	2 1/2	4 15/16	2 1/2	4 5/16	6 15/16	6 1/8	19	51
SCS 908 P.SR	138	33-36	1 3/8	6 11/16	10 1/4	2 7/8	1 9/16	2 1/2	1 1/8	2 11/16	4 15/16	2 11/16	4 1/2	7 3/4	6 5/16	19 13/16	55
SCS 909 P.SR	165	37-39	1 1/2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SCS 910 P.SR	187	40-42	1 5/8	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SCS 911 P.SR	248	43-48	1 3/4 - 1 7/8	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SCS 912 P.SR	309	49-54	2 - 2 1/8	8 7/8	14 11/16	4 1/4	2 3/8	3 3/4	1 3/4	4	7 5/8	4 1/8	7 5/16	11	9 5/8	27 13/16	205

MBL = Minimum Breaking Load

The standard finish of our sockets is blue. Hot dipped galvanized is also available. All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable. Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges). Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance. Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.