


Super reeve Connector Sockets with pin

Quenched and tempered cast steel

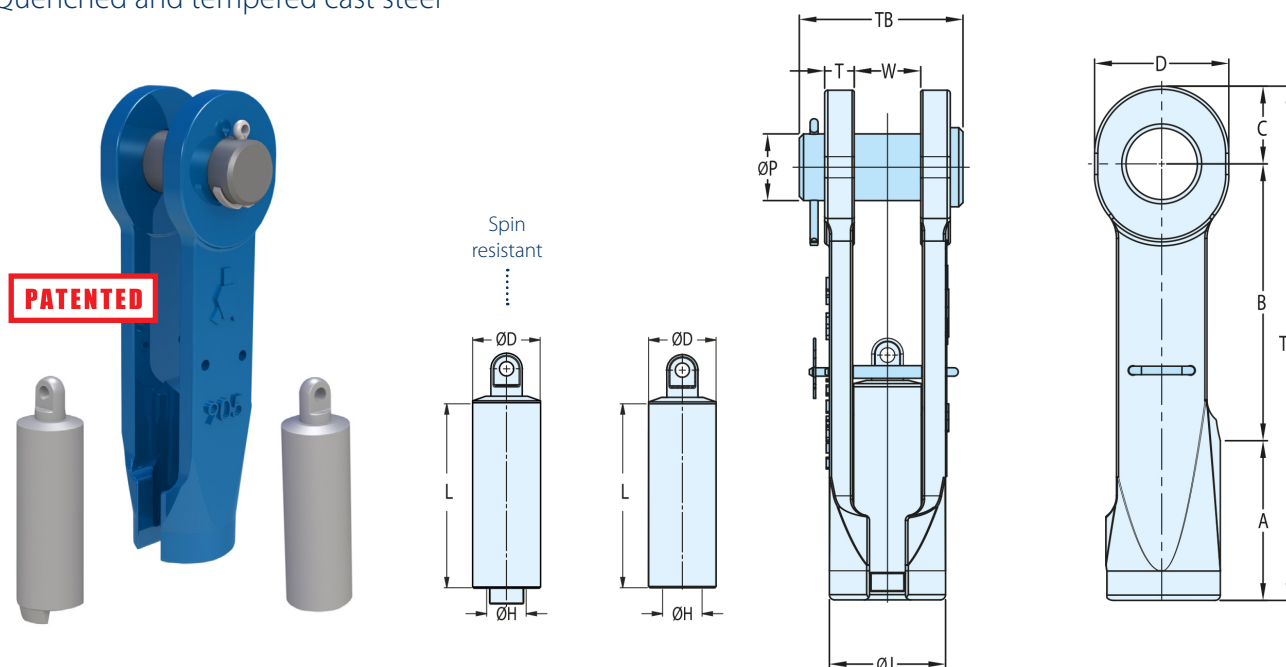

Model nr.	MBL (Mtons)	for wire Ø		Dimensions (mm)														Weight (kg)
		mm	inch	A	B	C	ØH	ØP	T	W	D	ØD	ØJ	L	TB	TL		
SCS 901 P	20	11-13	7 ₁₆ - 1 ₂	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
SCS 902 P	25	13-16	1 ₂ - 5 ₈	85	133	32	19	30	14	32	58	32	56	98	85	250	3,1	
SCS 903 P	40	16-19	5 ₈ - 3 ₄	90	160	40	22	35	16	38	70	40	65	114	95	290	4,8	
SCS 904 P	55	20-22	7 ₈	107	184	45	26	41	19	44	80	44	77	130	110	336	8	
SCS 905 P	75	23-26	1	115	211	60	31	50	22	51	104	52	88	142	128	386	12	
SCS 906 P	90	27-29	1 1 ₈	140	215	65	34	57	25	57	114	58	96	159	142	420	16	
SCS 907 P	125	30-32	1 1 ₄	150	260	73	36	63	28	63	126	64	110	177	155	483	23	
SCS 908 P	125	33-36	1 3 ₈	170	260	73	40	64	28	69	126	68	114	197	160	503	25	
SCS 902 P.SR	25	13-16	1 ₂ - 5 ₈	85	133	32	19	30	14	32	58	32	56	98	85	250	3,1	
SCS 903 P.SR	40	16-19	5 ₈ - 3 ₄	90	160	40	22	35	16	38	70	40	65	114	95	290	4,8	
SCS 904 P.SR	55	20-22	7 ₈	107	184	45	26	41	19	44	80	44	77	130	110	336	8	
SCS 905 P.SR	75	23-26	1	115	211	60	31	50	22	51	104	52	88	142	128	386	12	
SCS 906 P.SR	90	27-29	1 1 ₈	140	215	65	34	57	25	57	114	58	96	159	142	420	16	
SCS 907 P.SR	125	30-32	1 1 ₄	150	260	73	36	63	28	63	126	64	110	177	155	483	23	
SCS 908 P.SR	125	33-36	1 3 ₈	170	260	73	40	64	28	69	126	68	114	197	160	503	25	
SCS 909 P.SR	150	37-39	1 1 ₂	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
SCS 910 P.SR	170	40-42	1 5 ₈	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
SCS 911 P.SR	225	43-48	1 3 ₄ - 1 7 ₈	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
SCS 912 P.SR	280	49-54	2 - 2 1 ₈	225	373	108	60	95	45	101	194	105	185	280	244	706	93	

MBL = Minimum Breaking Load

The standard finish of our sockets is blue. Hot dipped galvanized is also available. All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.